

# PEMSERTER<sup>®</sup> SERIES 4<sup>®</sup> PRESS

The PEMSERTER<sup>®</sup> Series 4<sup>®</sup> press is totally pneumatic providing 6 tons of force and has a 45.7 cm / 18" throat depth which provides clearance for a variety of chassis configurations. It is designed to install self-clinching fasteners in size M2 / #0 thru M10 / 3/8" in steel, and sizes up to M12 / 1/2" in aluminum panels or circuit boards.



Stroke Counter



Laser Pointer



**New  
Standard  
Features**



Lockable Tool/Accessories Storage Cabinet

## Features and Benefits


- ◆ Insertion force adjustable from 4.5 to 53.4 kN / 1000 lbs. to 6 tons.
- ◆ Pneumatic power for speed, consistency, and simple operation. Requires shop air only.
- ◆ Integral point-of-operation safety.
- ◆ Large parts tray with dividers.
- ◆ Rapid tooling changeover, perfect for short production runs.
- ◆ Laser pointer, stroke counter, and lockable cabinet for tools and accessories storage.
- ◆ One-year parts warranty and two-year limited warranty on pneumatic components.

# PEMSERTER® Series 4® Press

## Specifications

Ram Force	4.5 to 53.4 kN / 1,000 to 12,000 lbs.
Pressure System Type	Pneumatic / Lever
Air Requirements*	6 to 7 BAR / 90 to 100 PSI 12 mm / 1/2" dia. minimum line flow
Throat Depth	45.7 cm / 18"
Height (on cabinet)	167.6 cm / 66"
Width (of press)	43.2 cm / 17"
Weight	Press - 259 kg / 570 lbs. With Cabinet - 372 kg / 819 lbs.
Cabinet Dimensions	74 cm L x 66 cm W x 76 cm H 29" L x 26" W x 30" H

\*1 psi = 0.07 bar. 1 bar = 14.5 psi.

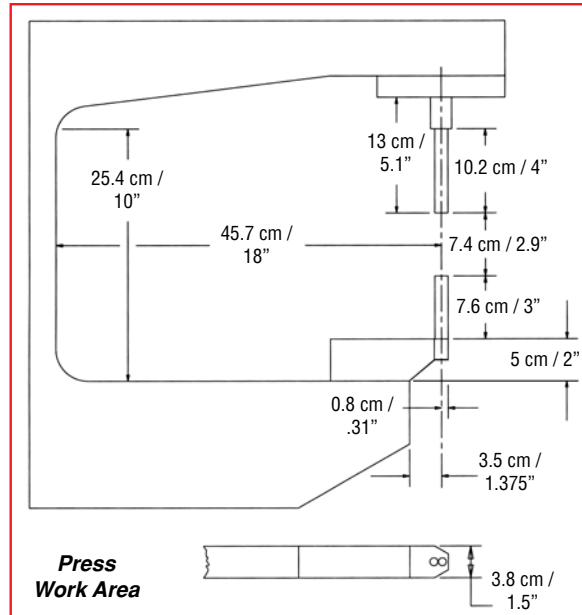

## Optional Anvil Holders and Tooling


Optional anvil holders and tooling can be easily installed on all new and existing PEMSERTER® Series 4® presses.



*Top Mount Reverse Flange Anvil Holder includes punch and anvil.*



*Bottom Mount Reverse Flange Anvil Holder.*

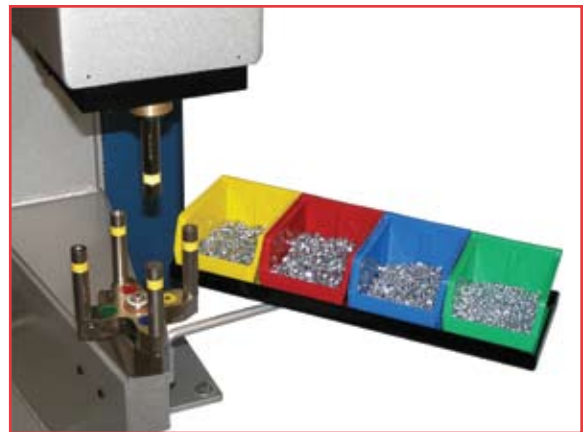

*The PEMSERTER® QX4™ manual Turret Tool System provides an efficient method to quickly change between four different anvil tools. The one-handed operation of this tool allows an operator to install four different types and/or sizes of fasteners with one set-up (fastener dependent). For more information see PEM Bulletin QX4 on our web site.*

*Specifications subject to change without notice.  
Check our website for the most current version of this bulletin.*

© 2009, PennEngineering

**PennEngineering®**



PS4L-2

**North America:** Danboro, PA 18916 USA • E-mail: pemsert@pemnet.com • Tel: +1-215-766-8853 • Fax: +1-215-766-3634 • 800-523-5321 (USA Only)  
**U.K. And Europe:** Doncaster, England • E-mail: uk@pemnet.com Tel: +44 (0)1302 765700 • Fax: +44 (0)1302 367580  
**Asia/Pacific:** Singapore • E-mail: singapore@pemnet.com • Tel: +65-6-745-0660 • Fax: +65-6-745-2400  
Shanghai, China • E-mail: china@pemnet.com • Tel: +86-21-5868-3688 • Fax: +86-21-5868-3988

Visit our PEMNET™ Resource Center at [www.pemnet.com](http://www.pemnet.com)